# Silent series

# interpreter booths

The highest ISO standards and requirements as requested by users, have resulted in the Audipack "Silent Series" Interpreter booths. The Silent Series consists of four versions, the Silent 6300, the Silent 9300, 9400 and 9500. All versions are fully transportable in an optional flightcase.



# The Silent Series is



## easy and quick to deploy

For effective interpretation, silence is required. The best solution is an Audipack interpreter booth.

In developing these booths, Audipack has paid full attention to a number of requirements e.g. flexibility, weight, good looks, highquality materials, ease of use and durability. The scratch resistant surface combined with anodised aluminium frame, gives an attractive and professional appearance.

The Silent Series is easy and fast to deploy.

One person can do the job. Connection of one section to another is achieved using special locks.

All elements and panels are interchangeable, so there is no difficulty in adapting the construction to local conditions. Even the door can be placed on any side. The roof elements are connected to each other in the same way as the wall, resulting in a safe and solid construction.

All Audipack's interpreter booths are officially tested.

- A Panoramic view windows
- Advanced cable management
- Quick installation
- ISO 4043 approved



## 6300 SILENT SERIES, ISO 4043




4043				
Ref.	P1483			
External dimensions in mm	W 1720 x D 1720 x H 2280			
	incl. ventilation and adjustable feets			
Internal dimensions	W 1600 x D 1600 x H 2000			
Weight incl. safety glass and table	340 Kg			
Colour	Light grey (approx. RAL 7042)			
	Other colours available on request			
Sound insulation capacity	Better than ISO 4043			


Number of booth parts incl. table and floor Table dimensions in mm Including floor Ventilation Optional

SILENT - 6300 According DIN 56924\* INTERPRETER BOOTH 13 1600 x 500 ISO 4043 yes WWW.AUDIPACK.COM Included P4363, double glass

Extension sets to 3 or 4 person booth

 $^{\ast}$  DIN 56924 approved only when the optional double glass is mounted











## 9300-MK II, ISO 4043, PERFECT RENTAL SOLUTION



### Ref.

External dimensions in mm Internal dimensions Weight incl. safety glass and table Colour exterior

Colour interior Sound insulation capacity Number of booth parts incl. table Table dimensions in mm Ventilation


## P4302


W 1682 x D 1682 x H 2041 excl. ventilation W 1600 x D 1600 x H 2000 210 Kg Light grey (approx. RAL 7042) Other colours available on request Dark grey and white Better than ISO 4043 11



1600 x 500 Optional: Ventilation A, fixed (height: 85 mm) Optional: Ventilation B, detachable (height: 170 mm)

Silent series sound insulation capacity
















## 9300, CLASSIC INTERPRETER BOOTH



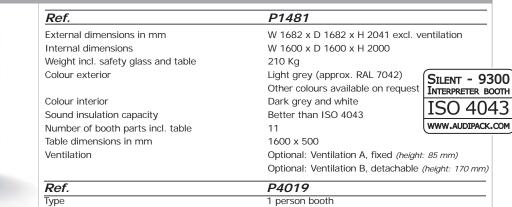

Silent series sound insulation capacity





External dimensions in mm



150 Kg

W 814 x D 1682 x H 2041 excl. ventilation



Ventilation A




## 9400 SILENT SERIES, LIGHT WEIGHT VERSION



Ref.	P4301
External dimensions in mm	W 1682 x D 1682 x H 2041 excl. ventilation
Internal dimensions	W 1600 x D 1600 x H 2000
Weight incl. table	<b>130</b> Kg
Colour exterior	Light grey (approx. RAL 7042)
	Other colours available on request
Colour interior	Dark grey and white
Number of booth parts incl. table	11
Table dimensions in mm	1600 x 500
Ventilation	Optional: Ventilation B, detachable (height: 170 mm)





Cable passage




Light weight





www.audipack.com

## 9500 SILENT SERIES, ISO 4043, VERY COMPACT IN TRANSPORT

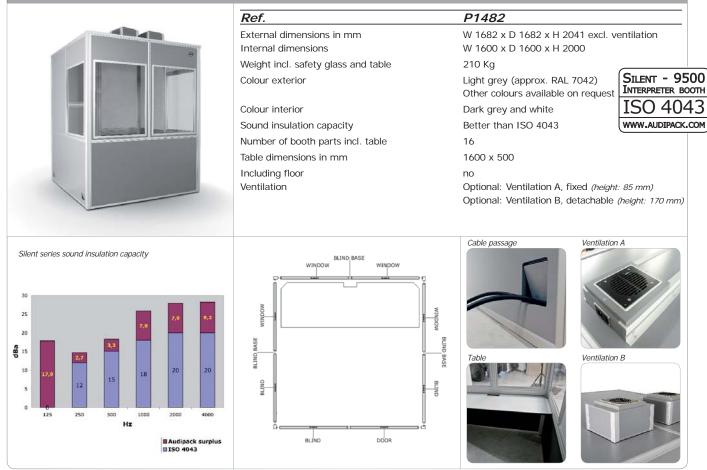

# Silent series interpreter booths ACCESSORIES

Flightcases				
Transport your interpreter booth nice and safe in a Audipack flightcase.				
Ref. Suitable for Booth Description	<b>5604/5887</b> 6300 Set of 2	<b>15645</b> 9300, 9300 MKII, 9400 Front loader	<b>17495</b> 9300 1P Front loader	8969 9500, with ventilation B Front loader (standing model)





# TRANSPORT CART Image: State of the sta

## Extension set

	XTENSION SETS					
			end an interpreter booth th to a 3 or 4 person booth.			1 roof part 1 front part 1 back part 1 floor part (6300 only) 1 table extension
Ref Suit	f. able for Booth	<b>P4000</b> 6300	<b>P4023</b> 9300 classic	<b>P4304</b> 9300 MK II	<b>P4303</b> 9400	<b>P4026</b> 9500

## PODIUM, FOR RENTAL PURPOSES, EASY DETACHABLE

<b>Ref.</b>	<b>P5660</b>
Platform dimension in mm	W 1690 x D 2275
Product dimensions in mm	W 1770 x D 2345 x H 450